


HOW TO SELECT THE RIGHT WATCH BAND FOR STANDARD BELT TYPE BUCKLE.

PRINT AT 100% FOR PRECISE MEASURING (DO NOT HOLD BAND UP TO SCREEN)

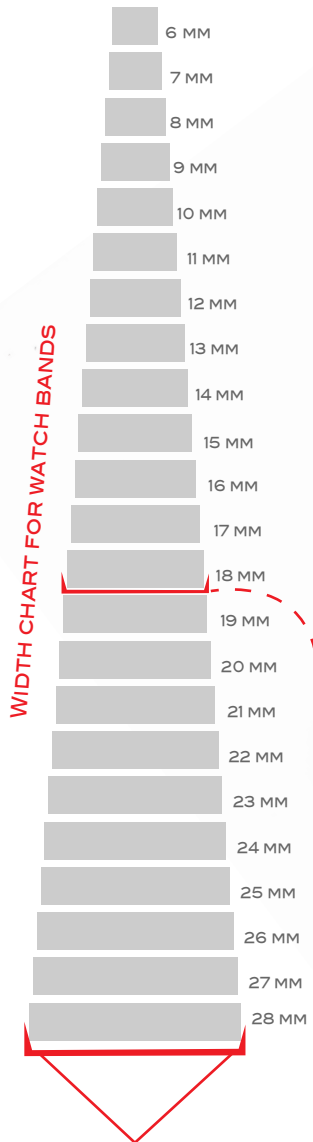

FIRST MEASUREMENT
DISTANCE **INSIDE** OF **METAL LUGS**

SECOND MEASUREMENT
INSIDE OF **BUCKLE**



TO GET THE MOST ACCURATE MEASUREMENT, HOLD EITHER YOUR WATCH OR WATCH BAND UP TO THE PRINTED CHART. MEASURE THE WIDTH OF THE WATCH BAND ITSELF OR THE SPACE BETWEEN THE WATCH'S LUGS.

ALL OF THE WATCH BANDS ON OUR WEBSITE SHOW TWO WIDTH MEASUREMENTS, FOR EXAMPLE : 22X16. THE FIRST NUMBER (22) IS THE WIDTH OF THE BAND BETWEEN THE LUGS IN MILLIMETERS, THE SECOND NUMBER (16) IS THE WIDTH OF THE BAND WHERE IT ATTACHES TO THE BUCKLE.

PLEASE NOTE, CERTAIN WATCHES REQUIRE SPECIALTY BANDS WITH UNIQUE NOTCHES OR ATTACHMENTS. UNLESS SPECIFICALLY SHOWN, OUR WATCH BANDS DO NOT INCLUDE A BUCKLE. YOU SHOULD BE ABLE TO USE YOUR EXISTING BUCKLE ON THE NEW WATCH BAND.

DEPLOYANT/DEPLOYMENT BUCKLES MAY REQUIRE A DIFFERENT STYLE OF STRAP. CALL FOR ASSISTANCE.

CAREFULLY MEASURE THE DISTANCE BETWEEN THE INSIDE OF LUGS & BUCKLE



CALL TOLL-FREE 9AM-6PM 800.705.1112